


T0(3)-.../Z/SVB T0(3)-.../V/SVB

	a
T0	7.5 mm (0.3")
T3	9.5 mm (0.37")
UV-T0	9 mm (0.35")


	T0...	T3...
	1 x 0.75 - 1.5mm ²	1 x 0.75 - 4.0 mm ²
	2 x 0.75 - 1.5 mm ²	2 x 0.75 - 4.0 mm ²
	1 x 1.0 - 2.5 mm ²	1 x 1.0 - 6.0 mm ²
	2 x 1.0 - 2.5 mm ²	2 x 1.0 - 6.0 mm ²
tightening torque	1 Nm (8.85 lb-in)	1.6 Nm (14.16 lb-in)
	AWG18 - AWG14	AWG14 - AWG10
		2 Nm (17.7 lb-in)





T0(3).../Z

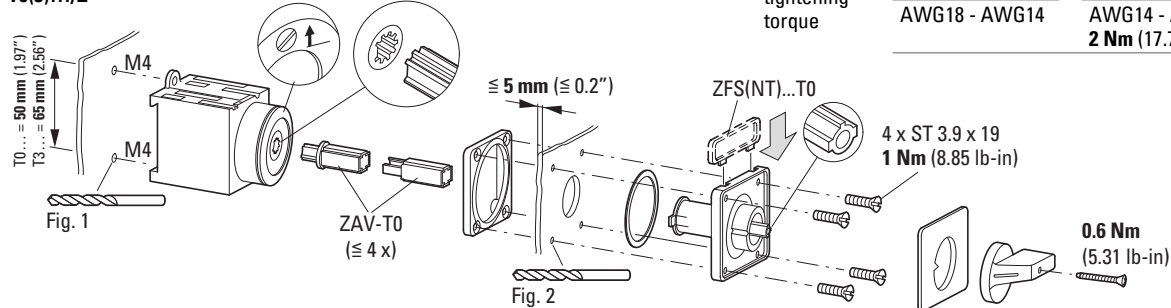












































T0(3)-.../Z/SVB

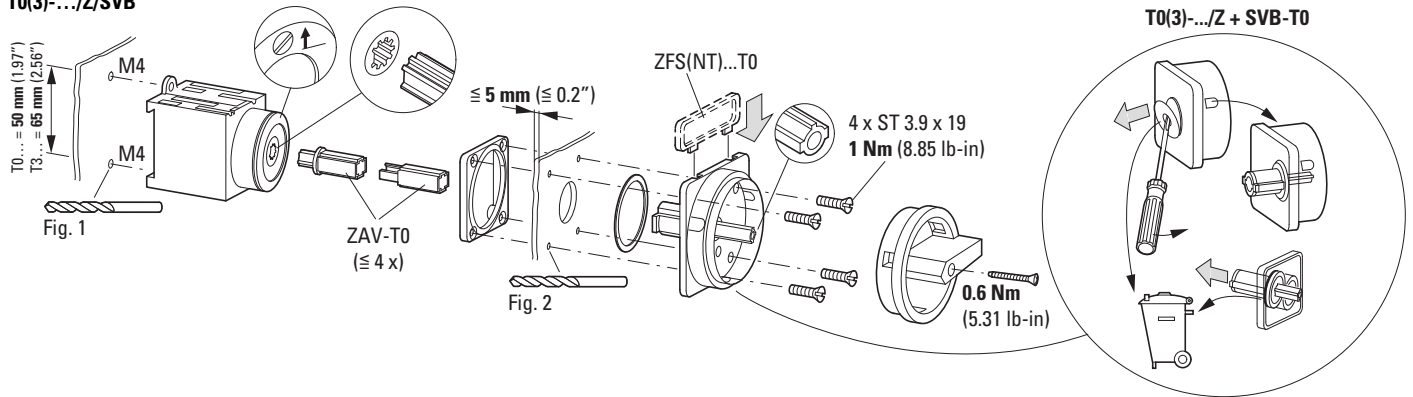

T0(3)-.../V/SVB

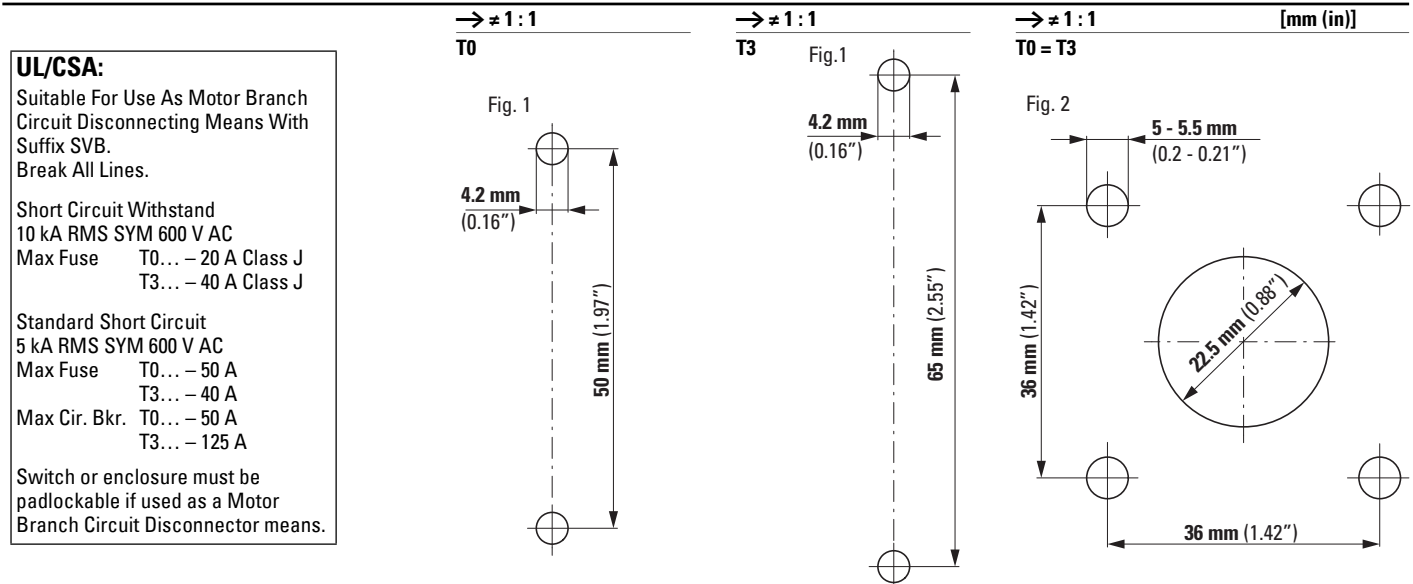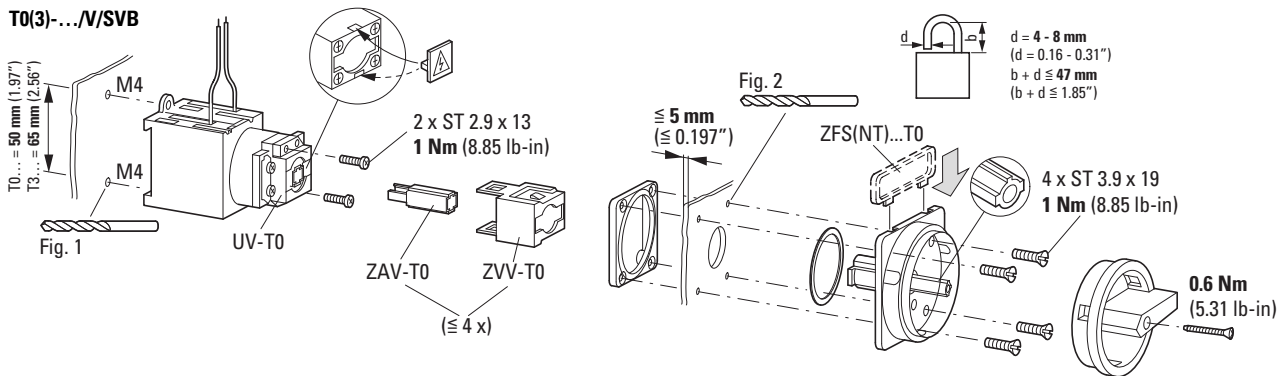

UL/CSA:
Suitable For Use As Motor Branch Circuit Disconnecting Means With Suffix SVB.
Break All Lines.
Short Circuit Withstand
10 kA RMS SYM 600 V AC
Max Fuse T0... - 20 A Class J
T3... - 40 A Class J
Standard Short Circuit
5 kA RMS SYM 600 V AC
Max Fuse T0... - 50 A
T3... - 40 A
Max Cir. Bkr. T0... - 50 A
T3... - 125 A
Switch or enclosure must be padlockable if used as a Motor Branch Circuit Disconnecter means.

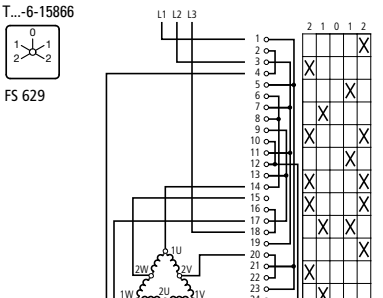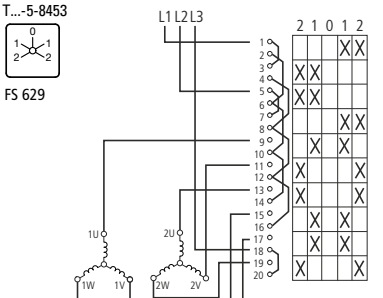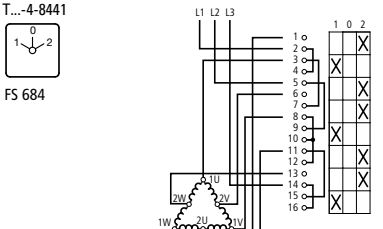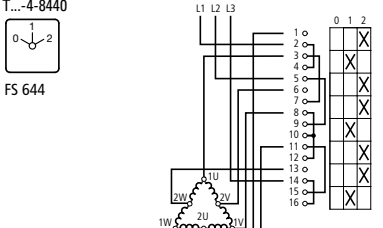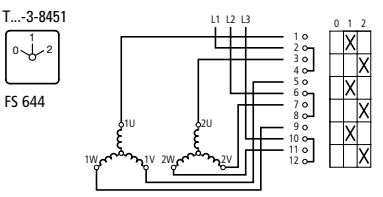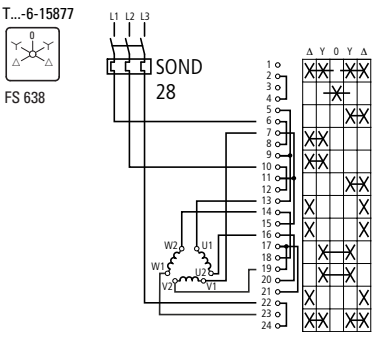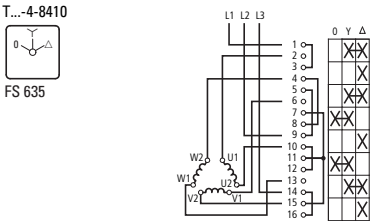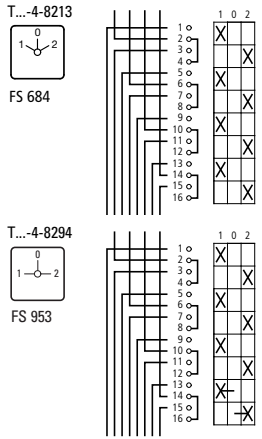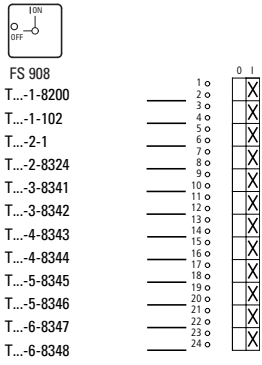

12/17 IL03801021Z