
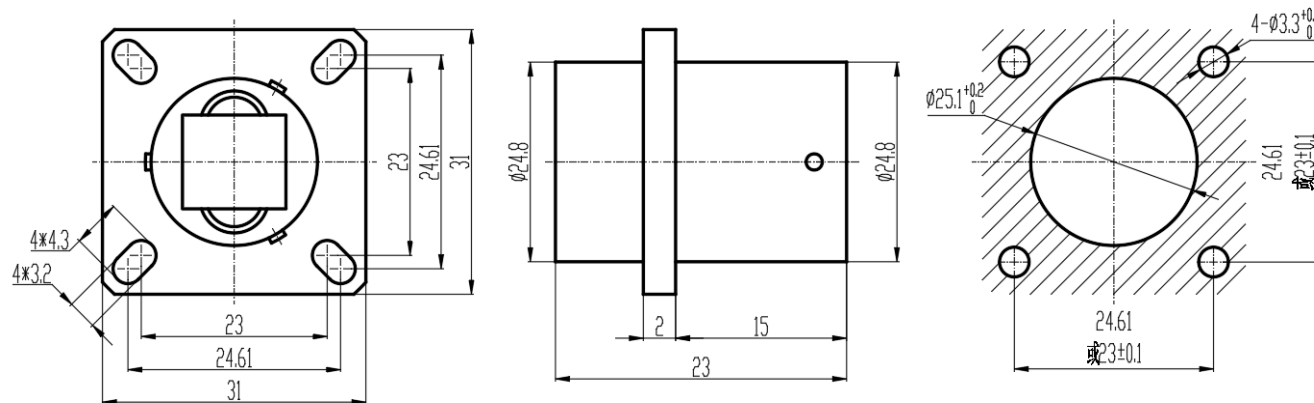


REV.	ECN. NO.	APPD.
A	WL-21-006	Jerry zhang



### Technical Specifications

Operating temperature: -55°C - +125°C  
 Relative humidity: 90%-95% at 40°C ±2°C  
 Operating pressure: 4.39 kPa - 101.33 kPa  
 Vibration: frequency 10-2000 Hz, acceleration 147 m/s<sup>2</sup>  
 Shock: acceleration 490 m/s<sup>2</sup>  
 Mechanical life: ≥500 mating cycles  
 Housing material: Stainless steel  
 Contact part: RJ45\*1  
 Attenuation: 0.3 dB  
 Impedance: 100Ω  
 Data rate: 1000 Mbps  
 Dielectric strength: 100V at normal temperature  
 Operating voltage: 150V  
 Operating current: 1.5A  
 Contact resistance: ≤20 mΩ  
 Insulation resistance: ≥5000 MΩ

x.±	x.±	UNITS mm	NAME(INTENDED USE) RJ45 female socket	CLASS: <input type="checkbox"/> CONFIDENTIAL <input type="checkbox"/> SECRET <input checked="" type="checkbox"/> GENERAL						
.x± 0.8	.x'±	MAT'L	PART NO.(INTENDED USE) WLES25-9501							
.xx± 0.50	.xx'±	SEE NOTES	APPD: Yuan. wu 03/14'21	TITLE: CONN DRAWING						
.xxx±	.xxx'±	FINISH	Q'TY	DWG NO.: WLES25-9501-0385						
			CHKD: Lei. wang 03/15'21	 <table border="1"> <tr> <td>SCALE</td> <td>SHEET</td> <td>REV.</td> </tr> <tr> <td>N/A</td> <td>1/1</td> <td>A</td> </tr> </table>	SCALE	SHEET	REV.	N/A	1/1	A
SCALE	SHEET	REV.								
N/A	1/1	A								
			DRAW: Min. sun 03/16'21							

IDEAS GENERATED DRAWING. DON'T CHANGE BY HAND.