
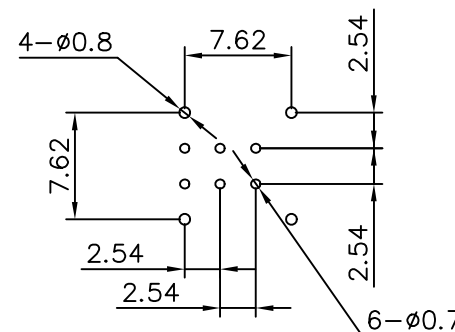


REV.	ECN. NO.	APPD.
A	WL-21-006	Jerry zhang

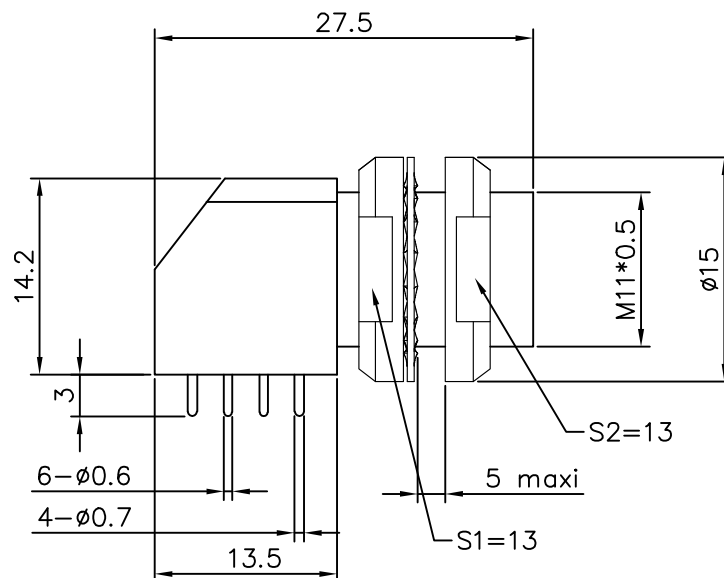

PCB hole size

Main performance specifications:

- Operating temperature: -55°C ~ 250°C
- Maximum humidity: <= 95% (at 60°C / 140°F)
- Shielding performance: 75dB (10MHz), 40dB (1GHz)
- Salt mist resistance: 96 hours
- Waterproof rating: 50
- Contact diameter: 0.7mm
- PCB mounting diameter: 0.6mm
- Vibration: 15g (10Hz ~ 2000Hz)
- Shock: 100g (6ms)
- Mechanical life: 5000 cycles
- Connection method: PCB mounting
- Contact resistance: 7.5mΩ
- Test voltage: 1050V (AC)
- Operating voltage: 350V
- Rated current: 7A

IDEAS GENERATED DRAWING. DON'T CHANGE BY HAND.

x.±	x.±	UNITS mm	NAME(INTENDED USE) 1B 6-pin fixed female socket							
.x± 0.8	.x±	MAT'L								
.xx± 0.50	.xx±	SEE NOTES	PART NO.(INTENDED USE) WLES13-7302	CLASS: <input type="checkbox"/> CONFIDENTIAL <input type="checkbox"/> SECRET <input checked="" type="checkbox"/> GENERAL						
.xxx±	.xxx±	FINISH	APPD: Yuan. wu 03/14'21	TITLE: CONN DRAWING						
		Q'TY	CHKD: Lei. wang 03/15'21	DWG NO.: WLES13-7302-0008						
			DRAW: Min. sun 03/16'21	<table border="1"> <tr> <td>SCALE</td> <td>SHEET</td> <td>REV.</td> </tr> <tr> <td>N/A</td> <td>1/1</td> <td>A</td> </tr> </table>	SCALE	SHEET	REV.	N/A	1/1	A
SCALE	SHEET	REV.								
N/A	1/1	A								