




Compact distribution board-flush mounting; multimedia; 3-rows; flush sheet steel door

Part no. KLV-36UPM-F
Catalog No. 178830

Delivery program

| | | | |
|--|-------|--|---|
| Product image | | |  |
| Basic function | | | Basic device |
| Product function | | | Installation distribution boards |
| Product range | | | KLV multimedia |
| Design | | | Flush mounted |
| Installation site | | | Indoor |
| Type of installation | | | Flush mounting |
| Door/Flap | | | White |
| Degree of Protection | | | IP30 |
| Colour | | | White |
| Module rack | | | Media mounting plate |
| Shroud for protection against accidental contact | | | Without |
| Rows | Count | | 3 |
| Module units per row | | | 12 |
| Description | | | IP30 Protection Class II Plastic enclosure with sheet steel door, white (RAL 9016) Note: To obtain protection class II, all devices installed on the mounting plate must be of the fully insulated type. |
| Cable entries | | | Cable entries on top and bottom, side, back plate |
| PE and N terminals design | | | Without |
| Equipment supplied | | | Wall trough Door/Frame Device support rails Microperforated mounting plate Device holder 2x single-way socket outlet Spirit level for leveling 3D adjustment element for mounting designed to adjust the mounting depth by up to 18 mm Cable retainer Nail lugs Installation instructions |

Technical data

General

| | | | |
|---|----|------|------------------------------------|
| Standards | | | IEC/EN 62208, IEC/EN 60670-24 (GP) |
| RoHS (in accordance with Directive 2002/95/EC of the European Parliament and Council) | | | conform |
| Ambient temperature | | °C | -5 - +40 |
| Degree of Protection | | | IP30 |
| Protection class | | | II (totally insulated) |
| Rated operational voltage | Ue | V AC | 230 |
| Rated frequency | f | Hz | 50 |

Material characteristics

| | | | |
|----------|--|--|--|
| Material | | | Polystyren (plastic) Sheet steel, powder-coated |
| Colour | | | white (RAL 9016) |

Material properties

| | | | |
|------------|--|--|--|
| Mechanical | | | |
|------------|--|--|--|

| | | | |
|-------------------|--|--|------|
| Impact resistance | | | IK05 |
|-------------------|--|--|------|


Design verification as per IEC/EN 61439

| Technical data for design verification | | | |
|---|----------------|---|--|
| Heat dissipation, at an ambient temperature of 35°C, delta T: 20 degrees in top of the enclosure, calculated as per IEC 60890 | | | |
| Individual enclosure, flush mounting | P _V | W | 20 |
| Heat dissipation, at an ambient temperature of 35°C, delta T: 35 degrees in top of the enclosure, calculated as per IEC 60890 | | | |
| Individual enclosure, flush mounting | P _V | W | 43 |
| IEC/EN 61439 design verification | | | |
| 10.2 Strength of materials and parts | | | |
| 10.2.2 Corrosion resistance | | | Meets the product standard's requirements. |
| 10.2.3.1 Verification of thermal stability of enclosures | | | Meets the product standard's requirements. |
| 10.2.3.2 Verification of resistance of insulating materials to normal heat | | | Meets the product standard's requirements. |
| 10.2.3.3 Verification of resistance of insulating materials to abnormal heat and fire due to internal electric effects | | | 650 °C; meets the product standard's requirements. |
| 10.2.4 Resistance to ultra-violet (UV) radiation | | | Not relevant to indoor installations. |
| 10.2.5 Lifting | | | Does not apply to enclosures without lifting aids. |
| 10.2.6 Mechanical impact | | | IK05 |
| 10.2.7 Inscriptions | | | Meets the product standard's requirements. |
| 10.3 Degree of protection of ASSEMBLIES | | | IP30 |
| 10.4 Clearances and creepage distances | | | Is the panel builder's responsibility. |
| 10.5 Protection against electric shock | | | Protection class 2, therefore not applicable. |
| 10.6 Incorporation of switching devices and components | | | Is the panel builder's responsibility. |
| 10.7 Internal electrical circuits and connections | | | Is the panel builder's responsibility. |
| 10.8 Connections for external conductors | | | Is the panel builder's responsibility. |
| 10.9 Insulation properties | | | |
| 10.9.2 Power-frequency electric strength | | | U _i = 400 V AC |
| 10.9.3 Impulse withstand voltage | | | 4 kV |
| 10.9.4 Testing of enclosures made of insulating material | | | Meets the product standard's requirements. |
| 10.10 Temperature rise | | | The panel builder is responsible for the temperature rise calculation. Eaton will provide heat dissipation data for the devices. |
| 10.11 Short-circuit rating | | | Is the panel builder's responsibility. |
| 10.12 Electromagnetic compatibility | | | Is the panel builder's responsibility. |
| 10.13 Mechanical function | | | Meets the product standard's requirements. |

Technical data ETIM 7.0

| Data and telecommunication (EG000037) / Distributor for telecommunication (EC000374) | | | |
|---|--|----|-------------------------|
| Electric engineering, automation, process control engineering / Electrical installation, device / Connection devices / Distributor for telecommunication (ecl@ss10.0.1-27-14-44-26 [AEI678006]) | | | |
| Model | | | Distributor enclosure |
| Mounting method | | | Flush mounted (plaster) |
| With connecting lugs | | | No |
| Max. number of dual cores | | | 12 |
| Mounting dimension (standardised) | | | Other |
| DIN-compatible | | | Yes |
| 110-compatible | | | Yes |
| LSA | | | No |
| SID | | | No |
| Material | | | Steel plate/plastic |
| Degree of protection (IP) | | | IP30 |
| Degree of protection (NEMA) | | | Other |
| Colour | | | White |
| Height | | mm | 590 |
| Width | | mm | 360 |
| Depth | | mm | 100 |
| Number of mountable connection strips | | | 0 |

Dimensions

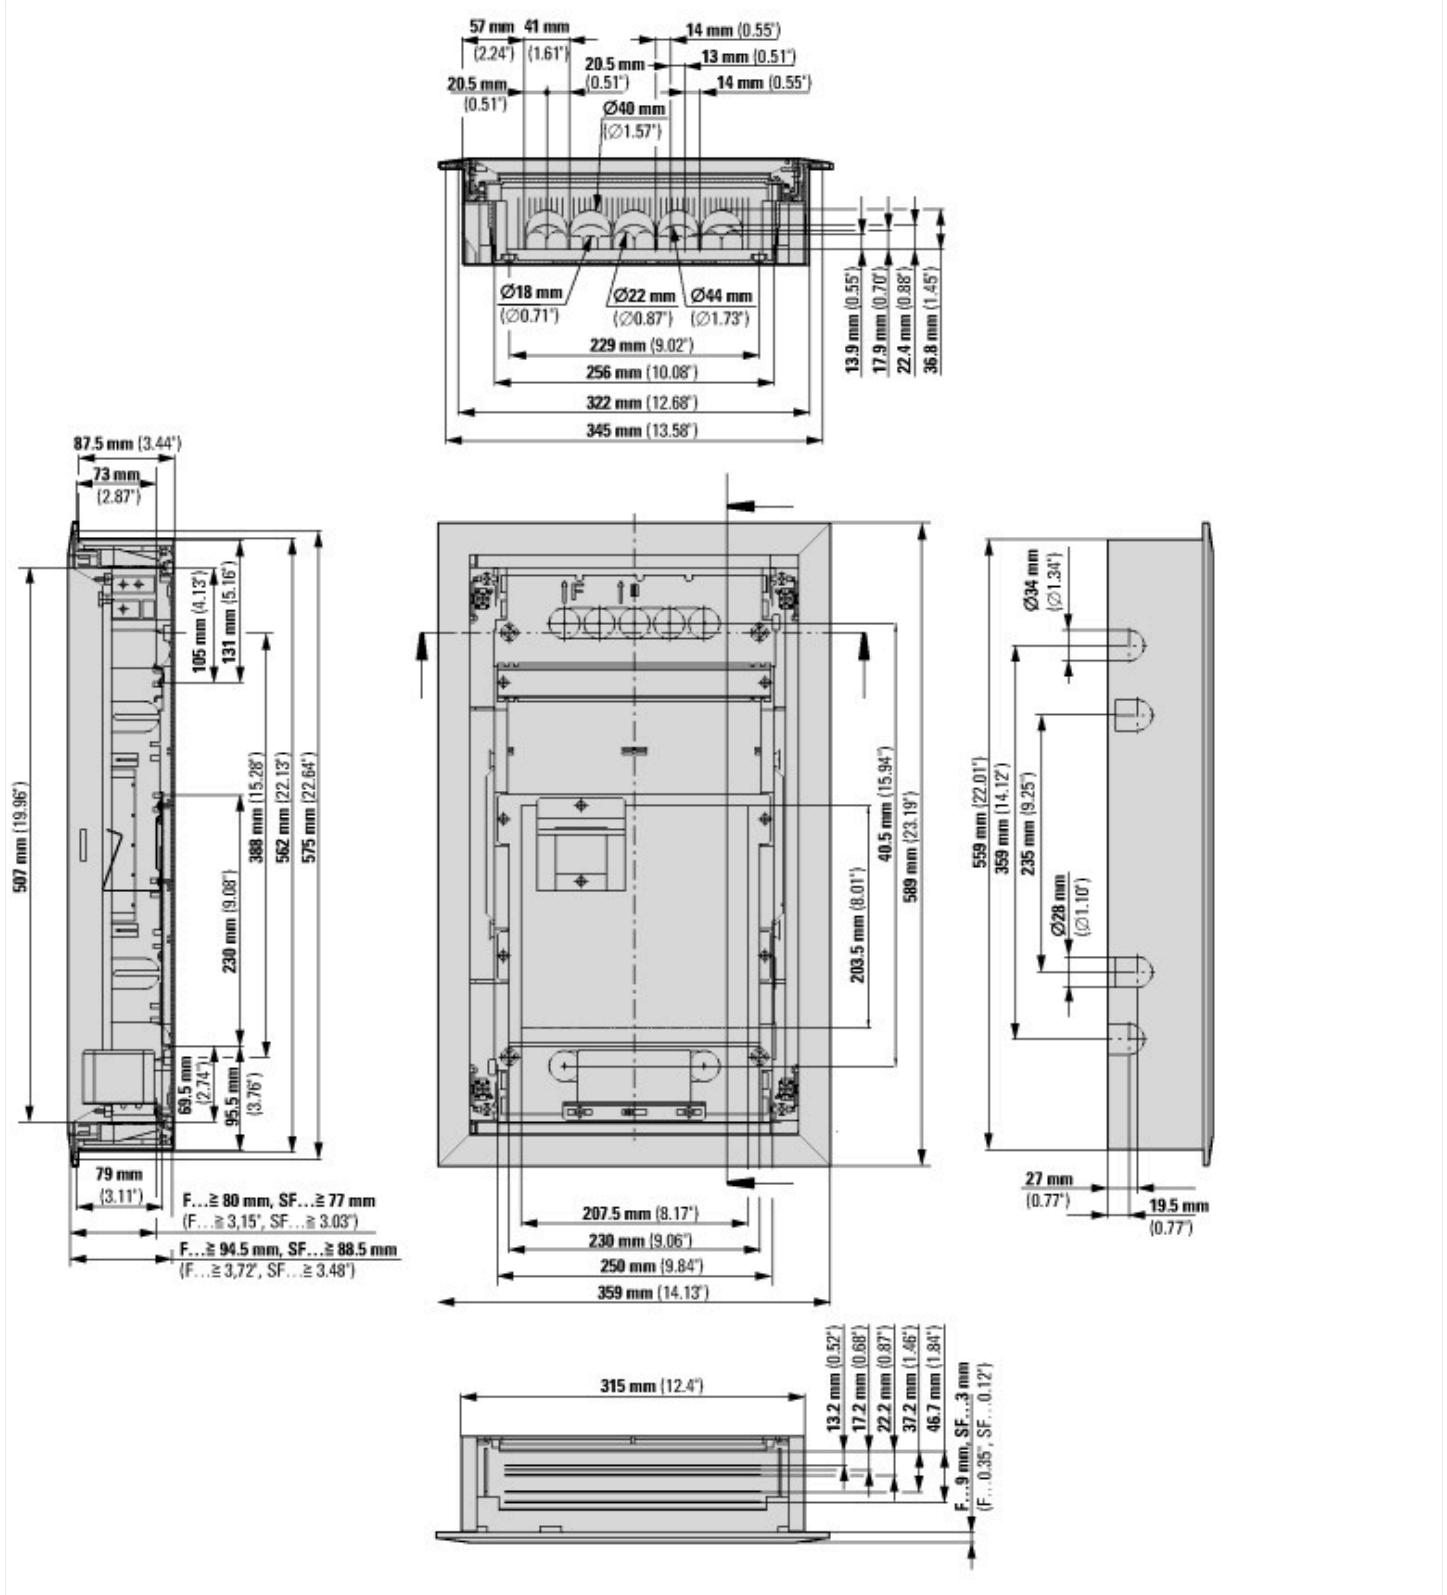



Additional product information (links)

Product overview (Web)

<http://www.eaton.eu/DE/Europe/Electrical/ProductsServices/Residential/index.htm>